


Flexible Waveguides

FEATURES:

- ❖ Available from 1.14 GHz to 110 GHz
- ❖ Low VSWR
- ❖ Low Insertion Loss
- ❖ Rugged Construction & Flexibility

APPLICATION:

- ❖ Communications
- ❖ Radar

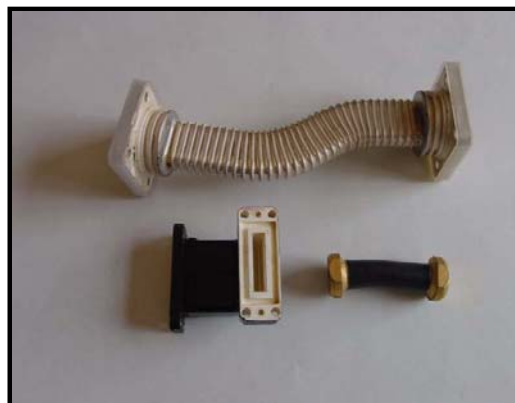

CFT & CFW Series

SPECIFICATIONS:

TWISTABLE:

Waveguide Size	WR 650		WR 510		WR 430		WR 340		WR 284		WR 229		WR 187		WR 159			
Frequency Range (GHz)	1.12	-	1.45	-	1.70	-	2.20	-	2.60	-	3.30	-	3.95	-	4.90	-		
	1.70		2.20		2.60		3.30		3.95		4.90		5.85		7.05			
VSWR Max.	1.10	1.06	1.10	1.10	1.07	1.10	1.07	1.10	1.07	1.10	1.07	1.10	1.09	1.10	1.09			
Insertion Loss (dB/m) Max.	1.10	*	0.01	0.20	0.22	0.01	*	0.25	0.01	*	0.30	0.02	0.40	0.02	0.45	0.05	0.5	0.06

Waveguide Size	WR 137		WR 112		WR 102		WR 90		WR 75		WR 62		WR 51		WR 42			
Frequency Range (GHz)	5.85	-	7.05	-	7.00	-	8.20	-	10.00	-	12.40	-	15.00	-	18.00	-		
	8.20		10.00		11.00		12.40		15.00		18.00		22.00		26.50			
VSWR Max.	1.10	1.09	1.10	1.10	1.10	1.10	1.10	1.10	1.12	1.10	1.12	1.15	1.20	1.23	1.20			
Insertion Loss (dB/m) Max.	0.6	*	0.07	0.7	0.08	*	0.09	0.8	0.10	*	1.0	0.15	1.7	0.20	2.0	0.35	2.5	0.35



Flexible Waveguides

TWISTABLE:

Waveguide Size	WR 34		WR 28		WR 22
Frequency Range (GHz)	22.00 -		26.50 -		33.00 -
	33.00		40.00		50.00
VSWR Max.	1.25	1.30	1.25	1.30	1.35
Insertion Loss (dB/m) Max.	2.7	*	3.0	*	1.20
		0.50		0.60	

* Insertion Loss is in dB Per Foot with silver plated waveguide

FLEXIBLE SEAMLESS:

Waveguide Size	WR 650	WR 510	WR 430	WR 340	WR 284		WR 229		WR 187		WR 159	
Frequency Range (GHz)	1.14 -	1.45 -	1.72 -	2.20 -	2.60 -		3.30 -		3.95 -		4.90 -	
	1.72	2.20	2.60	3.30	3.95		4.90		5.85		7.05	
VSWR Max.	1.20	1.20	1.20	1.20	1.20	1.08	1.20	1.08	1.20	1.09	1.20	1.10
Insertion Loss (dB/m) Max.	0.01	0.013	0.017	0.024	0.033	**	0.043	**	0.064	**	0.077	**
						0.018		0.020		0.030		0.040

Waveguide Size	WR 137		WR 112		WR 102	WR 90		WR 75		WR 62	
Frequency Range (GHz)	5.85 -		7.05 -		7.00 -	8.20 -		10.00 -		12.40 -	
	8.20		10.0		11.00	12.40		15.00		18.00	
VSWR Max.	1.20	1.10	1.20	1.10	1.10	1.20	1.10	1.20	1.10	1.20	1.12
Insertion Loss dB Max.	0.1	**	0.14	**	**	0.15	**	0.18	**	0.23	**
		0.050		0.060	0.060		0.100		0.120		0.150



Flexible Waveguides


FLEXIBLE SEAMLESS:

Waveguide Size	WR 51		WR 42		WR 34	WR 28		WR 22	WR 19	WR 15	WR 12	WR 10
Frequency Range (GHz)	15.00	-	18.00	-	22.00	26.50	-	33.00	40.00	50.00	60.00	75.00
	22.00		26.50		33.00	40.00		50.00	60.00	75.00	90.00	110.00
VSWR Max.	1.25	1.20	1.30		1.30	1.10	1.30	1.10	1.10	1.10	1.12	1.15
Insertion Loss dB Max.	0.33	**	0.5	**	0.6	*	0.83	*	*	*	*	*
		0.32		0.35		0.04		0.05	0.08	0.11	0.20	0.25

* Insertion Loss is in dB Per Inch with silver plated waveguide ** Insertion Loss is in dB Per Foot

HOW TO ORDER:

Specify Model Number

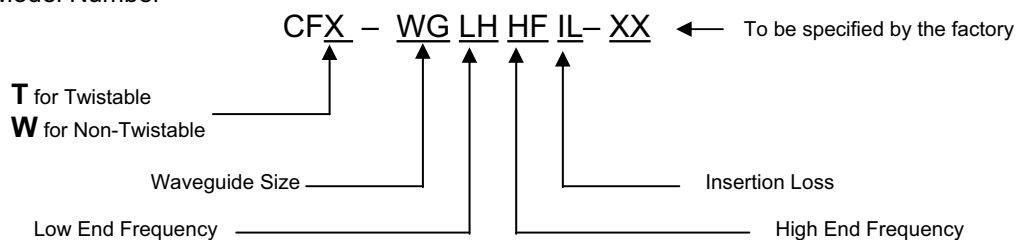

Example: To order CFT Flexible Waveguidewith 2.20 to 3.30 GHz with 0.5 dB maximum insertion loss, specify CFT-340020302-XX.

CERNEX RESERVE THE RIGHT TO CHANGE THE SPECIFICATIONS WITHOUT NOTICE