


800 / 900 MHz Yagis

- All-welded unit construction
- No adjustments ever needed
- waterproof design
- Stainless steel hardware
- Pigtail mounted N-female connector

Models:	Freq. MHz	Gain (dBi)	No. Elem	F to B db	H Bmwidth -3dB°	E Bmwidth -3dB°	Type (f)	Length in. (cm)	Weight lb. (kg)	W/sur area ft2 (m2)	W/survival mph (kph)	Pigtail in. (cm)
PC926N	928-960	10.6	6	18	55	65	N	24.75 (62.9)	1.61 (.72)	.26 (.024)	125 (200)	19(48.3)
PC904N	896-980	8.1	4	15	70	100	N	13 (33)	1.12 (.50)	.11 (.01)	125 (200)	19(48.3)
PC906N	896-940	10.6	6	18	55	65	N	24.75 (62.9)	1.62 (.73)	.26 (.024)	125 (200)	19(48.3)
PC804N	806-902	8.1	4	15	70	90	N	13 (33)	1.12 (.50)	.11 (.01)	125 (200)	19(48.3)
PC806N	806-866	10.6	6	18	55	65	N	24.75 (62.9)	1.69 (.76)	.26 (.024)	125 (200)	19(48.3)




PC804N




Typical 6 Element

H-Plane
E-Plane

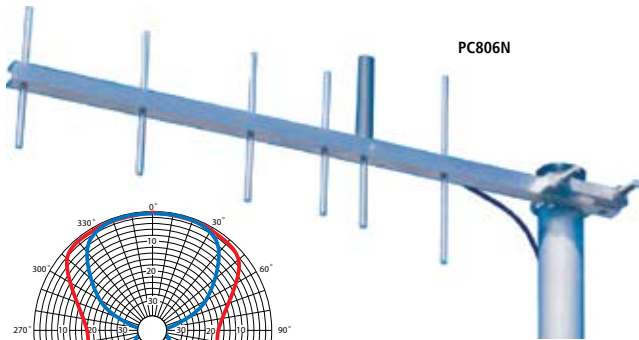

PC806N



Typical 4 Element